



redENERGY G4

Pulsed Fiber Laser
Wavelength: 1060nm

20W EP-Z



Benefits



Greater flexibility

Range of pulses for new and improved applications



Superior quality

Industry leading reliability and product warranty



Increased productivity

Higher powers and pulse rates for faster processing



Improved profitability

Low cost of ownership with no service requirements

Applications

- Ablation
- Cleaning
- Drilling
- Engraving
- Marking
- Micro-machining
- Precision cutting
- Scribing
- Solar cell processing
- Thin film patterning
- Thin foil cutting
- Welding

20W EP-Z is ideal for...

High quality marking
With pulse duration 3-2000ns



- White marking metals
- Black mark anodised aluminium

High quality cutting & drilling
With pulse energy >1.2mJ



- Cutting metal foils up to 0.25mm
- Drilling holes down to 40µm

High quality micro-machining
With peak power >10kW



- Engraving metals
- Surface texturing

To Purchase: Call us on +44 (0) 1489 779 696

www.spilasers.com | sales@spilasers.com

© SPI Lasers UK Ltd


SM-S00547_C



redENERGY G4

20W EP-Z


Pulsed Fiber Laser
Wavelength: 1060nm



PulseTune functionality

EP Series

- Up to 48 optimised PulseTune waveforms
- Single shot to 4 MHz pulse repetition frequency



Beam quality

Z Type ($M^2 < 1.6$)

- Higher peak power and pulse energy with only minor increase in spot size and good depth of focus


Laser characteristics

Parameter	Unit	SP-020P-A-EP-Z
Central emission wavelength	nm	1059 - 1065
Nominal average output power	W	20
M^2		<1.6
Collimated beam diameter	mm	3 / 5 / 7.5 / 10
PulseTune waveforms		48
Maximum pulse energy	mJ	>1.2
Maximum peak power	kW	>10
Pulse duration range	ns	3 - 2000
Pulse repetition frequency (PRF) range	kHz	1 - 4000
CW mode (with modulation)	kHz	YES (1 - 100)

System integration details

Parameter	Unit	SP-020P-A-EP-Z
Cooling		Air
Beam delivery cable length	m	3
Laser module dimensions	mm	347 x 201 x 95
Power supply voltage	V DC	24
Power supply requirement	W	250
Operating temperature range	°C	0 to +45
Relative humidity range		5-95% RH (non-condensing)

To learn more about our **redENERGY G4** Fiber Laser products visit our website: www.spilasers.com

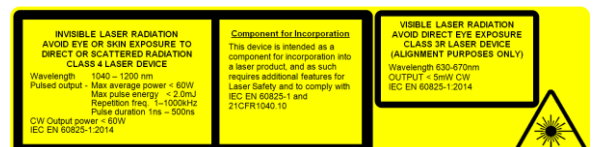

Terms and Conditions

All product information is believed to be accurate and subject to change without notice. A complete product specification will be issued on request and also at time of order acknowledgement. The user assumes all risks and liability whatsoever in connection with the use of the product and its application. These lasers are designed as products for incorporation or integration into other equipment.