




# redENERGY G4

Pulsed Fiber Laser **200W EP-M**  
Wavelength: 1060nm



## Benefits



**Greater flexibility**

Range of pulses for new and improved applications



**Superior quality**

Industry leading reliability and product warranty



**Increased productivity**

Higher powers and pulse rates for faster processing



**Improved profitability**

Low cost of ownership with no service requirements

## Applications

- Ablation
- Cleaning
- Drilling
- Engraving
- Marking
- Micro-machining
- Precision cutting
- Scribing
- Solar cell processing
- Thin film patterning
- Thin foil cutting
- Welding

## 200W EP-M is ideal for...

### High speed cleaning

With large spot sizes ( $M^2 \sim 5$ )



- Large area rust & paint removal
- Polishing with  $R_a < 1\mu m$

### High speed welding

With pulse energy  $> 5mJ$



- Metal foils up to 2.5mm
- Dissimilar metals

### High speed engraving

With peak power  $> 40kW$



- VIN marking
- Drilling holes  $> 120\mu m$

To Purchase: Call us on +44 (0) 1489 779 696  
[www.spilasers.com](http://www.spilasers.com) | [sales@spilasers.com](mailto:sales@spilasers.com)

© SPI Lasers UK Ltd  
SM-S00544\_C



# redENERGY G4

**200W EP-M**  
**Pulsed Fiber Laser**  
**Wavelength: 1060nm**



**x40 PulseTune functionality**

**EP Series**

- 40+ optimised PulseTune waveforms
- Single shot to 4 MHz pulse repetition frequency

**Beam quality**

**M Type (M<sup>2</sup> 4.0 – 6.0)**

- Highest pulse energies and longer pulse durations ideal for welding and cleaning


## Laser characteristics

Parameter	Unit	SP-200P-A-EP-M
Central emission wavelength	nm	1061 - 1067
Nominal average output power	W	200
M <sup>2</sup>		5
Collimated beam diameter	mm	10
PulseTune waveforms		>45
Maximum pulse energy	mJ	>5
Maximum peak power	kW	>50
Pulse duration range	ns	12 - 2000
Pulse repetition frequency (PRF) range	kHz	1 - 4000
CW mode (with modulation)	kHz	No

## System integration details

Parameter	Unit	SP-200P-A-EP-M
Cooling		Air
Beam delivery cable length	m	3 / 5
Laser module dimensions	mm	473 x 417 x 133
Power supply voltage	V DC	36
Power supply requirement	W	950
Operating temperature range	°C	+10 to +40
Relative humidity range		5-95% RH (non-condensing)

To learn more about our **redENERGY G4** Fiber Laser products visit our website: [www.spilasers.com](http://www.spilasers.com)

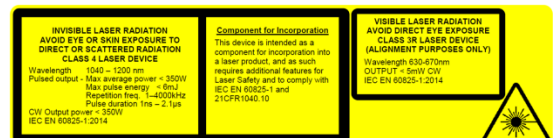

### Terms and Conditions

All product information is believed to be accurate and subject to change without notice. A complete product specification will be issued on request and also at time of order acknowledgement. The user assumes all risks and liability whatsoever in connection with the use of the product and its application. These lasers are designed as products for incorporation or integration into other equipment.